




VITI AUTOLFETTANTI PUNTA CHIODO SELF-TAPPING SCREWS BUGLE HEAD



DISEGNO TECNICO/ TECHNICAL DESIGN

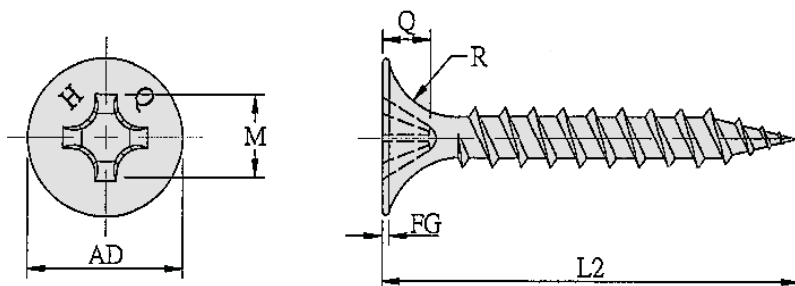

SPECIFICAZIONI SPECIFICATIONS		AD	FG	R	M	Q	D1	PH
3.5 - 17	Max	8.10	0.80	5.00	5.10	3.10	3.65	1.50
	Min	7.90		4.00	4.50	2.65	3.50	
3.8 - 16	Max	8.10	0.80	5.00	5.10	3.10	4.00	1.60
	Min	7.90		4.00	4.50	2.65	3.85	
4.2 - 16	Max	8.70	0.80	5.00	5.10	3.10	4.30	1.60
	Min	8.40		4.00	4.50	2.65	4.15	
4.8 - 16	Max	9.15	0.80	5.00	5.10	3.18	4.95	1.60
	Min	8.85		4.00	4.50	2.65	4.80	

LUNGHEZZA/LENGTH (L2)	TOLLERANZA/TOLERANCE
fino a/until 25mm	+ 0 / -0.80mm
oltre/beyond 26mm	+ 0 / -1.30mm

MATERIALE/MATERIAL: C1022

FILETTATURE/THREADS

M3.5 - 17xL2

M3.8 - 16xL2

M4.2 - 16xL2

M4.8 - 16xL2

RESISTENZA/RESISTANCE: HV 650 - 700

ROTAZIONE/ROTATION

M3.5: 28kg - cm Min

M3.8: 35kg - cm Min

M4.2: 45kg - cm Min

M4.8: 65kg - cm Min

